

- trigonometry.
- The analytical method is more accurate than the graphical method, because the latter involves some extensive calculations.
 - The analytical method is less accurate than the graphical method, because the former includes drawing all figures to the right scale.
 - The analytical method is more accurate than the graphical method, because the latter is limited by the precision of the drawing.
8. What is a component of a two dimensional vector?
- A component is a piece of a vector that points in either the x or y direction.
 - A component is a piece of a vector that has half of the magnitude of the original vector.
 - A component is a piece of a vector that points in the direction opposite to the original vector.
 - A component is a piece of a vector that points in the same direction as original vector but with double of its magnitude.
9. How can we determine the global angle θ (measured counter-clockwise from positive x) if we know A_x and A_y ?
- $\theta = \cos^{-1} \frac{A_y}{A_x}$
 - $\theta = \cot^{-1} \frac{A_y}{A_x}$
 - $\theta = \sin^{-1} \frac{A_y}{A_x}$
 - $\theta = \tan^{-1} \frac{A_y}{A_x}$
10. How can we determine the magnitude of a vector if we know the magnitudes of its components?
- $|\vec{A}| = A_x + A_y$
 - $|\vec{A}| = A_x^2 + A_y^2$
 - $|\vec{A}| = \sqrt{A_x^2 + A_y^2}$
 - $|\vec{A}| = (A_x^2 + A_y^2)^2$

5.3 Projectile Motion

Section Learning Objectives

By the end of this section, you will be able to do the following:

- Describe the properties of projectile motion
- Apply kinematic equations and vectors to solve problems involving projectile motion

Section Key Terms

air resistance	maximum height (of a projectile)	projectile
projectile motion	range	trajectory

Properties of Projectile Motion

Projectile motion is the motion of an object thrown (projected) into the air. After the initial force that launches the object, it only experiences the force of gravity. The object is called a **projectile**, and its path is called its **trajectory**. As an object travels through the air, it encounters a frictional force that slows its motion called **air resistance**. Air resistance does significantly alter trajectory motion, but due to the difficulty in calculation, it is ignored in introductory physics.

The most important concept in projectile motion is that *horizontal and vertical motions are independent*, meaning that they don't influence one another. [Figure 5.27](#) compares a cannonball in free fall (in blue) to a cannonball launched horizontally in projectile motion (in red). You can see that the cannonball in free fall falls at the same rate as the cannonball in projectile motion. Keep in mind that if the cannon launched the ball with any vertical component to the velocity, the vertical displacements would not line up perfectly.

Since vertical and horizontal motions are independent, we can analyze them separately, along perpendicular axes. To do this, we separate projectile motion into the two components of its motion, one along the horizontal axis and the other along the vertical.

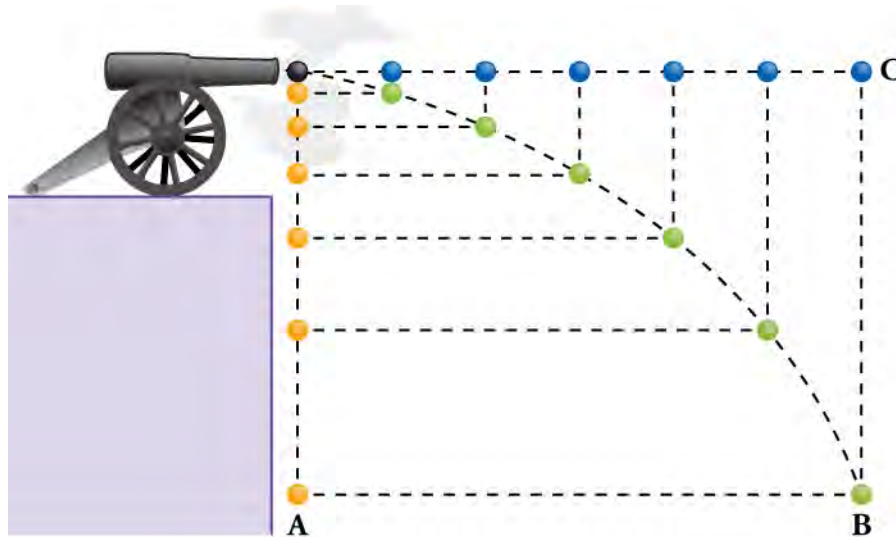


Figure 5.27 The diagram shows the projectile motion of a cannonball shot at a horizontal angle versus one dropped with no horizontal velocity. Note that both cannonballs have the same vertical position over time.

We'll call the horizontal axis the x -axis and the vertical axis the y -axis. For notation, \mathbf{d} is the total displacement, and \mathbf{x} and \mathbf{y} are its components along the horizontal and vertical axes. The magnitudes of these vectors are x and y , as illustrated in [Figure 5.28](#).

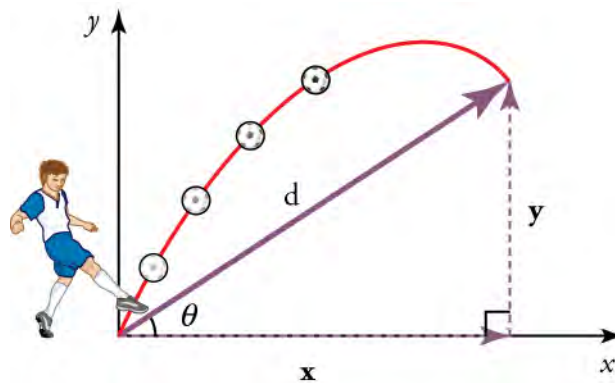


Figure 5.28 A boy kicks a ball at angle θ , and it is displaced a distance of \mathbf{s} along its trajectory.

As usual, we use velocity, acceleration, and displacement to describe motion. We must also find the components of these variables along the x - and y -axes. The components of acceleration are then very simple $\mathbf{a}_y = -\mathbf{g} = -9.80 \text{ m/s}^2$. Note that this definition defines the upwards direction as positive. Because gravity is vertical, $\mathbf{a}_x = 0$. Both accelerations are constant, so we can use the kinematic equations. For review, the kinematic equations from a previous chapter are summarized in [Table 5.1](#).

$$\begin{aligned} \mathbf{x} &= \mathbf{x}_0 + \mathbf{v}_{\text{avg}} t \text{ (when } \mathbf{a}=0 \text{)} \\ \mathbf{v}_{\text{avg}} &= \frac{\mathbf{v}_0 + \mathbf{v}}{2} \text{ (when } \mathbf{a}=0 \text{)} \\ \mathbf{v} &= \mathbf{v}_0 + \mathbf{a}t \\ \mathbf{x} &= \mathbf{x}_0 + \mathbf{v}_0 t + \frac{1}{2} \mathbf{a}t^2 \\ \mathbf{v}^2 &= \mathbf{v}_0^2 + 2\mathbf{a}(\mathbf{x} - \mathbf{x}_0) \end{aligned}$$

Table 5.1 Summary of
Kinematic Equations
(constant \mathbf{a})

Where \mathbf{x} is position, \mathbf{x}_0 is initial position, \mathbf{v} is velocity, \mathbf{v}_{avg} is average velocity, t is time and \mathbf{a} is acceleration.

Solve Problems Involving Projectile Motion

The following steps are used to analyze projectile motion:

1. Separate the motion into horizontal and vertical components along the x- and y-axes. These axes are perpendicular, so $A_x = A\cos\theta$ and $A_y = A\sin\theta$ are used. The magnitudes of the displacement \mathbf{s} along x- and y-axes are called x and y . The magnitudes of the components of the velocity \mathbf{v} are $v_x = v \cos \theta$ and $v_y = v \sin \theta$, where v is the magnitude of the velocity and θ is its direction. Initial values are denoted with a subscript 0.
2. Treat the motion as two independent one-dimensional motions, one horizontal and the other vertical. The kinematic equations for horizontal and vertical motion take the following forms

Horizontal Motion ($\mathbf{a}_x = 0$)

$$x = x_0 + v_x t$$

$$v_x = v_{0x} = \mathbf{v}_x = \text{velocity is a constant.}$$

Vertical motion (assuming positive is up $\mathbf{a}_y = -\mathbf{g} = -9.80 \text{ m/s}^2$)

$$y = y_0 + \frac{1}{2}(v_{0y} + v_y)t$$

$$v_y = v_{0y} - \mathbf{g}t$$

$$y = y_0 + v_{0y}t - \frac{1}{2}\mathbf{g}t^2$$

$$v_y^2 = v_{0y}^2 - 2g(y - y_0)$$

3. Solve for the unknowns in the two separate motions (one horizontal and one vertical). Note that the only common variable between the motions is time t . The problem solving procedures here are the same as for one-dimensional kinematics.
4. Recombine the two motions to find the total displacement \mathbf{s} and velocity \mathbf{v} . We can use the analytical method of vector addition, which uses $A = \sqrt{A_x^2 + A_y^2}$ and $\theta = \tan^{-1}(A_y/A_x)$ to find the magnitude and direction of the total displacement and velocity.

Displacement

$$\mathbf{d} = \sqrt{x^2 + y^2}$$

$$\theta = \tan^{-1}(y/x)$$

Velocity

$$\mathbf{v} = \sqrt{\mathbf{v}_x^2 + \mathbf{v}_y^2}$$

$$\theta_v = \tan^{-1}(\mathbf{v}_y/\mathbf{v}_x)$$

θ is the direction of the displacement \mathbf{d} , and θ_v is the direction of the velocity \mathbf{v} . (See [Figure 5.29](#))

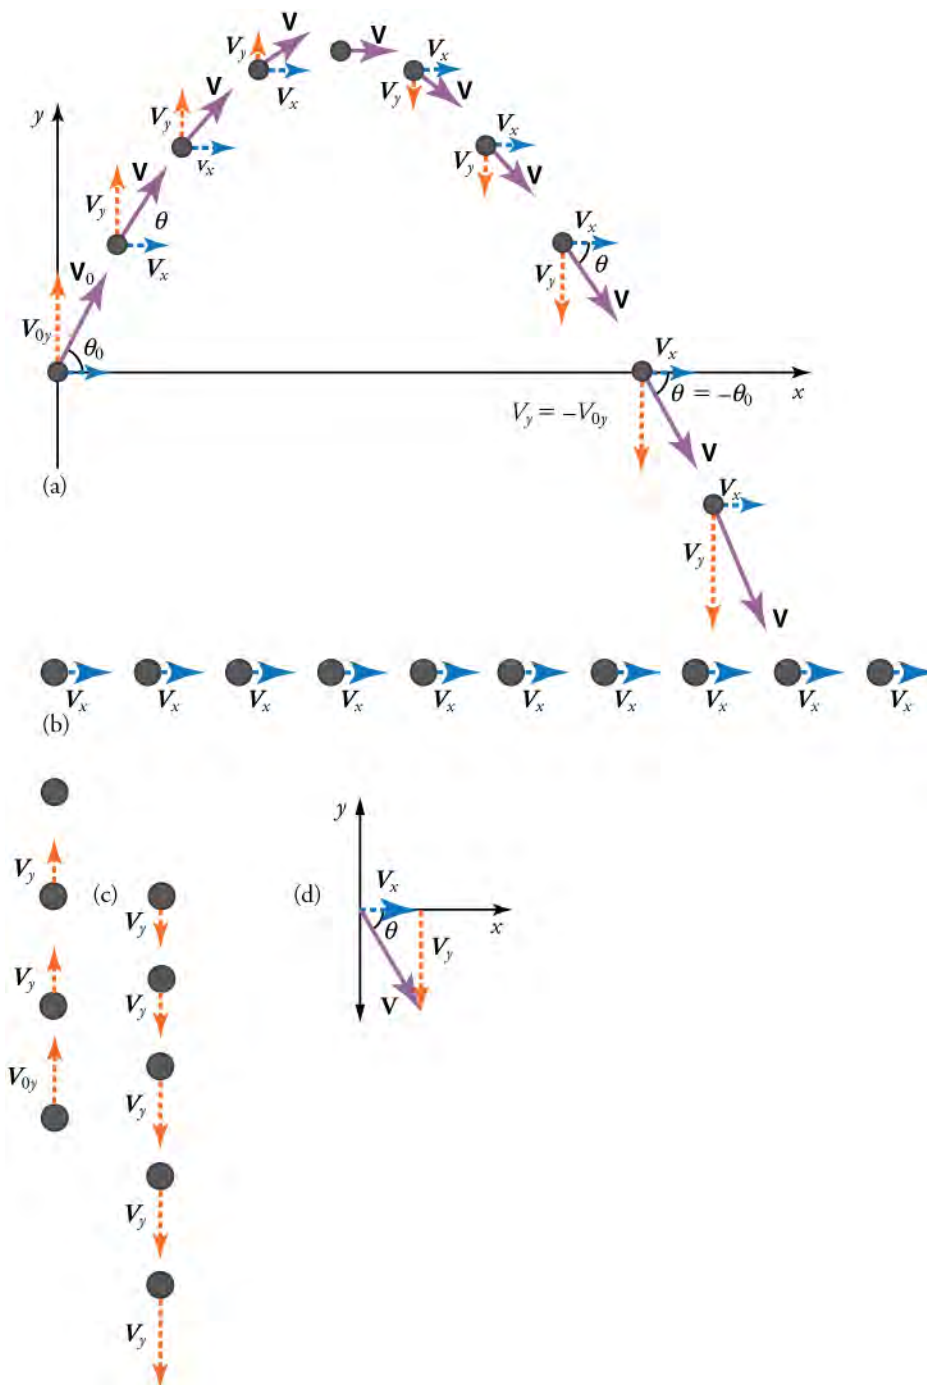


Figure 5.29 (a) We analyze two-dimensional projectile motion by breaking it into two independent one-dimensional motions along the vertical and horizontal axes. (b) The horizontal motion is simple, because $\mathbf{a}_x = 0$ and v_x is thus constant. (c) The velocity in the vertical direction begins to decrease as the object rises; at its highest point, the vertical velocity is zero. As the object falls towards the Earth again, the vertical velocity increases again in magnitude but points in the opposite direction to the initial vertical velocity. (d) The x - and y -motions are recombined to give the total velocity at any given point on the trajectory.

TIPS FOR SUCCESS

For problems of projectile motion, it is important to set up a coordinate system. The first step is to choose an initial position for \mathbf{x} and \mathbf{y} . Usually, it is simplest to set the initial position of the object so that $\mathbf{x}_0 = 0$ and $\mathbf{y}_0 = 0$.



WATCH PHYSICS

Projectile at an Angle

This video presents an example of finding the displacement (or range) of a projectile launched at an angle. It also reviews basic trigonometry for finding the sine, cosine and tangent of an angle.

[Click to view content \(https://www.khanacademy.org/embed_video?v=ZZ3901rAZWY\)](https://www.khanacademy.org/embed_video?v=ZZ3901rAZWY)

GRASP CHECK

Assume the ground is uniformly level. If the horizontal component a projectile's velocity is doubled, but the vertical component is unchanged, what is the effect on the time of flight?

- The time to reach the ground would remain the same since the vertical component is unchanged.
- The time to reach the ground would remain the same since the vertical component of the velocity also gets doubled.
- The time to reach the ground would be halved since the horizontal component of the velocity is doubled.
- The time to reach the ground would be doubled since the horizontal component of the velocity is doubled.



WORKED EXAMPLE

A Fireworks Projectile Explodes High and Away

During a fireworks display like the one illustrated in [Figure 5.30](#), a shell is shot into the air with an initial speed of 70.0 m/s at an angle of 75° above the horizontal. The fuse is timed to ignite the shell just as it reaches its highest point above the ground. (a) Calculate the height at which the shell explodes. (b) How much time passed between the launch of the shell and the explosion? (c) What is the horizontal displacement of the shell when it explodes?

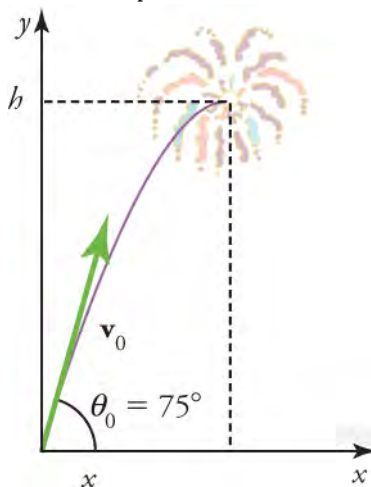


Figure 5.30 The diagram shows the trajectory of a fireworks shell.

Strategy

The motion can be broken into horizontal and vertical motions in which $\mathbf{a}_x = 0$ and $\mathbf{a}_y = \mathbf{g}$. We can then define \mathbf{x}_0 and \mathbf{y}_0 to be zero and solve for the **maximum height**.

Solution for (a)

By height we mean the altitude or vertical position y above the starting point. The highest point in any trajectory, the maximum height, is reached when $\mathbf{v}_y = 0$; this is the moment when the vertical velocity switches from positive (upwards) to negative (downwards). Since we know the initial velocity, initial position, and the value of \mathbf{v}_y when the firework reaches its maximum height, we use the following equation to find y

$$v_y^2 = v_{0y}^2 - 2g(y - y_0).$$

Because y_0 and v_y are both zero, the equation simplifies to

$$0 = v_{0y}^2 - 2gy.$$

Solving for y gives

$$y = \frac{v_{0y}^2}{2g}.$$

Now we must find v_{0y} , the component of the initial velocity in the y -direction. It is given by $v_{0y} = v_0 \sin \theta$, where v_0 is the initial velocity of 70.0 m/s, and $\theta = 75^\circ$ is the initial angle. Thus,

$$v_{0y} = v_0 \sin \theta = (70.0 \text{ m/s})(\sin 75^\circ) = 67.6 \text{ m/s}$$

and y is

$$y = \frac{(67.6 \text{ m/s})^2}{2(9.80 \text{ m/s}^2)},$$

so that

$$y = 233 \text{ m}.$$

Discussion for (a)

Since up is positive, the initial velocity and maximum height are positive, but the acceleration due to gravity is negative. The maximum height depends only on the vertical component of the initial velocity. The numbers in this example are reasonable for large fireworks displays, the shells of which do reach such heights before exploding.

Solution for (b)

There is more than one way to solve for the time to the highest point. In this case, the easiest method is to use

$y = y_0 + \frac{1}{2}(v_{0y} + v_y)t$. Because y_0 is zero, this equation reduces to

$$y = \frac{1}{2}(v_{0y} + v_y)t.$$

Note that the final vertical velocity, v_y , at the highest point is zero. Therefore,

$$\begin{aligned} t &= \frac{2y}{(v_{0y} + v_y)} = \frac{2(233 \text{ m})}{(67.6 \text{ m/s})} \\ &= 6.90 \text{ s}. \end{aligned}$$

Discussion for (b)

This time is also reasonable for large fireworks. When you are able to see the launch of fireworks, you will notice several seconds pass before the shell explodes. Another way of finding the time is by using $y = y_0 + v_{0y}t - \frac{1}{2}gt^2$, and solving the quadratic equation for t .

Solution for (c)

Because air resistance is negligible, $a_x = 0$ and the horizontal velocity is constant. The horizontal displacement is horizontal velocity multiplied by time as given by $x = x_0 + v_x t$, where x_0 is equal to zero

$$x = v_x t,$$

where v_x is the x -component of the velocity, which is given by $v_x = v_0 \cos \theta$. Now,

$$v_x = v_0 \cos \theta = (70.0 \text{ m/s})(\cos 75^\circ) = 18.1 \text{ m/s}.$$

The time t for both motions is the same, and so x is

$$x = (18.1 \text{ m/s})(6.90 \text{ s}) = 125 \text{ m}.$$

Discussion for (c)

The horizontal motion is a constant velocity in the absence of air resistance. The horizontal displacement found here could be useful in keeping the fireworks fragments from falling on spectators. Once the shell explodes, air resistance has a major effect, and many fragments will land directly below, while some of the fragments may now have a velocity in the $-x$ direction due to the

forces of the explosion.

The expression we found for y while solving part (a) of the previous problem works for any projectile motion problem where air resistance is negligible. Call the maximum height $y = h$; then,

$$h = \frac{v_{0y}^2}{2g}.$$

This equation defines the **maximum height of a projectile**. The maximum height depends only on the vertical component of the initial velocity.

WORKED EXAMPLE

Calculating Projectile Motion: Hot Rock Projectile

Suppose a large rock is ejected from a volcano, as illustrated in [Figure 5.31](#), with a speed of 25.0 m/s and at an angle 35° above the horizontal. The rock strikes the side of the volcano at an altitude 20.0 m lower than its starting point. (a) Calculate the time it takes the rock to follow this path.

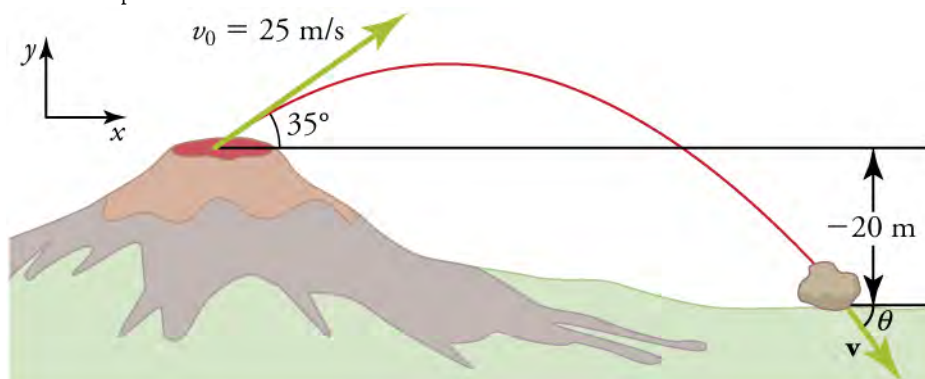


Figure 5.31 The diagram shows the projectile motion of a large rock from a volcano.

Strategy

Breaking this two-dimensional motion into two independent one-dimensional motions will allow us to solve for the time. The time a projectile is in the air depends only on its vertical motion.

Solution

While the rock is in the air, it rises and then falls to a final position 20.0 m lower than its starting altitude. We can find the time for this by using

$$y = y_0 + v_{0y}t - \frac{1}{2}gt^2.$$

If we take the initial position y_0 to be zero, then the final position is $y = -20.0$ m. Now the initial vertical velocity is the vertical component of the initial velocity, found from

$$v_{0y} = v_0 \sin \theta_0 = (25.0 \text{ m/s})(\sin 35^\circ) = 14.3 \text{ m/s}.$$

5.9

Substituting known values yields

$$-20.0 \text{ m} = (14.3 \text{ m/s})t - (4.90 \text{ m/s}^2)t^2.$$

Rearranging terms gives a quadratic equation in t

$$(4.90 \text{ m/s}^2)t^2 - (14.3 \text{ m/s})t - (20.0 \text{ m}) = 0.$$

This expression is a quadratic equation of the form $at^2 + bt + c = 0$, where the constants are $a = 4.90$, $b = -14.3$, and $c = -20.0$. Its solutions are given by the quadratic formula

$$t = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}.$$

This equation yields two solutions $t = 3.96$ and $t = -1.03$. You may verify these solutions as an exercise. The time is $t = 3.96$ s or -1.03 s. The negative value of time implies an event before the start of motion, so we discard it. Therefore,

$$t = 3.96 \text{ s}.$$

Discussion

The time for projectile motion is completely determined by the vertical motion. So any projectile that has an initial vertical velocity of 14.3 m/s and lands 20.0 m below its starting altitude will spend 3.96 s in the air.

Practice Problems

11. If an object is thrown horizontally, travels with an average x-component of its velocity equal to 5 m/s, and does not hit the ground, what will be the x-component of the displacement after 20 s?
 - a. -100 m
 - b. -4 m
 - c. 4 m
 - d. 100 m
12. If a ball is thrown straight up with an initial velocity of 20 m/s upward, what is the maximum height it will reach?
 - a. -20.4 m
 - b. -1.02 m
 - c. 1.02 m
 - d. 20.4 m

The fact that vertical and horizontal motions are independent of each other lets us predict the range of a projectile. The **range** is the horizontal distance **R** traveled by a projectile on level ground, as illustrated in [Figure 5.32](#). Throughout history, people have been interested in finding the range of projectiles for practical purposes, such as aiming cannons.

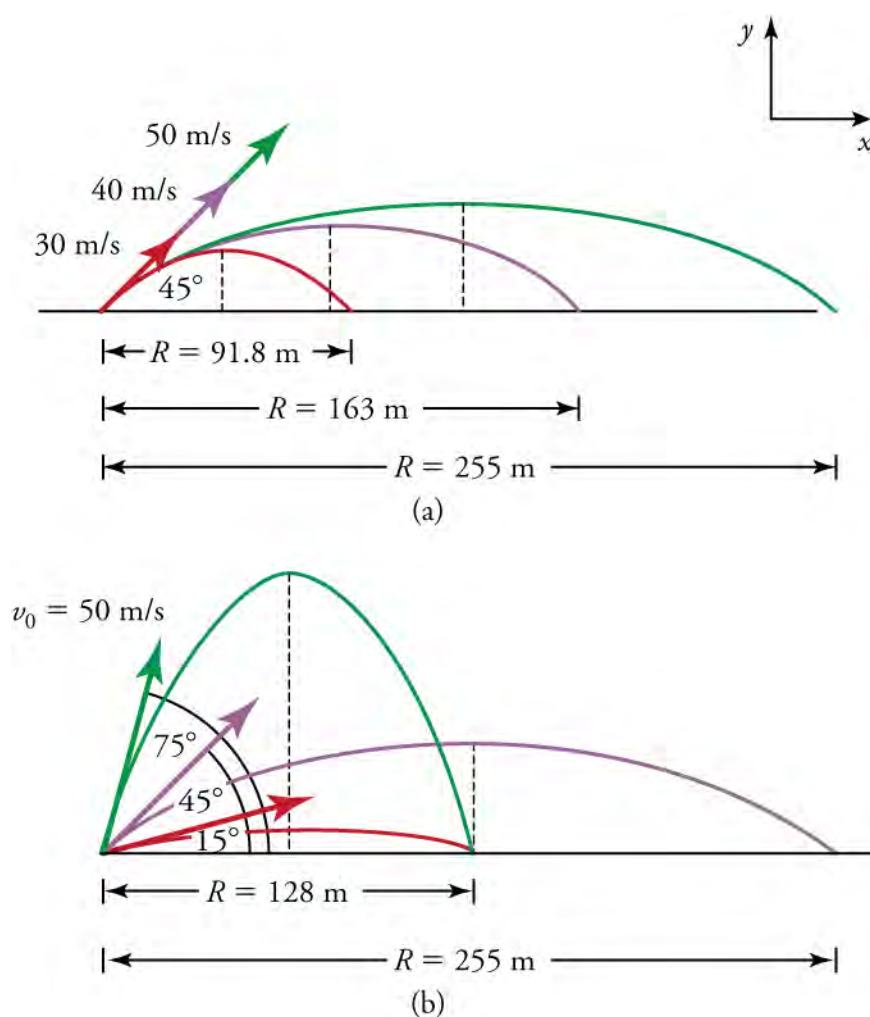


Figure 5.32 Trajectories of projectiles on level ground. (a) The greater the initial speed v_0 , the greater the range for a given initial angle. (b) The effect of initial angle θ_0 on the range of a projectile with a given initial speed. Note that any combination of trajectories that add to 90 degrees will have the same range in the absence of air resistance, although the maximum heights of those paths are different.

How does the initial velocity of a projectile affect its range? Obviously, the greater the initial speed v_0 , the greater the range, as shown in the figure above. The initial angle θ_0 also has a dramatic effect on the range. When air resistance is negligible, the range R of a projectile on level ground is

$$R = \frac{v_0^2 \sin 2\theta_0}{g},$$

where v_0 is the initial speed and θ_0 is the initial angle relative to the horizontal. It is important to note that the range doesn't apply to problems where the initial and final y position are different, or to cases where the object is launched perfectly horizontally.

Virtual Physics

Projectile Motion

In this simulation you will learn about projectile motion by blasting objects out of a cannon. You can choose between objects such as a tank shell, a golf ball or even a Buick. Experiment with changing the angle, initial speed, and mass, and adding in air resistance. Make a game out of this simulation by trying to hit the target.

[Click to view content \(https://archive.cnx.org/specials/317dbd00-8e61-4065-b3eb-f2b80db9b7ed/projectile-motion/\)](https://archive.cnx.org/specials/317dbd00-8e61-4065-b3eb-f2b80db9b7ed/projectile-motion/)

GRASP CHECK

If a projectile is launched on level ground, what launch angle maximizes the range of the projectile?

- a. 0°
- b. 30°
- c. 45°
- d. 60°

Check Your Understanding

13. What is projectile motion?
 - a. Projectile motion is the motion of an object projected into the air, which moves under the influence of gravity.
 - b. Projectile motion is the motion of an object projected into the air which moves independently of gravity.
 - c. Projectile motion is the motion of an object projected vertically upward into the air which moves under the influence of gravity.
 - d. Projectile motion is the motion of an object projected horizontally into the air which moves independently of gravity.
14. What is the force experienced by a projectile after the initial force that launched it into the air in the absence of air resistance?
 - a. The nuclear force
 - b. The gravitational force
 - c. The electromagnetic force
 - d. The contact force

5.4 Inclined Planes

Section Learning Objectives

By the end of this section, you will be able to do the following:

- Distinguish between static friction and kinetic friction
- Solve problems involving inclined planes

Section Key Terms

kinetic friction static friction

Static Friction and Kinetic Friction

Recall from the previous chapter that friction is a force that opposes motion, and is around us all the time. Friction allows us to move, which you have discovered if you have ever tried to walk on ice.

There are different types of friction—kinetic and static. **Kinetic friction** acts on an object in motion, while **static friction** acts on an object or system at rest. The maximum static friction is usually greater than the kinetic friction between the objects.

Imagine, for example, trying to slide a heavy crate across a concrete floor. You may push harder and harder on the crate and not move it at all. This means that the static friction responds to what you do—it increases to be equal to and in the opposite direction of your push. But if you finally push hard enough, the crate seems to slip suddenly and starts to move. Once in motion, it is easier to keep it in motion than it was to get it started because the kinetic friction force is less than the static friction force. If you were to add mass to the crate, (for example, by placing a box on top of it) you would need to push even harder to get it started and also to keep it moving. If, on the other hand, you oiled the concrete you would find it easier to get the crate started and keep it going.

[Figure 5.33](#) shows how friction occurs at the interface between two objects. Magnifying these surfaces shows that they are rough on the microscopic level. So when you push to get an object moving (in this case, a crate), you must raise the object until it can skip along with just the tips of the surface hitting, break off the points, or do both. The harder the surfaces are pushed together (such as if another box is placed on the crate), the more force is needed to move them.